C MODEL

Capacity: 55 tons in 14'-0"

Deck: Flat, 26' x 8' 6", loaded height 21" Gooseneck: Hydraulic detachable, non-

ground bearing

Adjustable ride height: 48" to 56"

Deck Storage: Front of deck Flooring: 2" Apitong: outsides only

Bogie: Fixed 3 axle

Outriggers: H.D. 13 each per side

Swing Clearance: 102"

Brakes: 16.5" x 7" air; auto slacks, non-abs

Tires: 255/70 R 22.5 16 pr

Wheels: 8.25" x 22.5" 10 hole steel wheels Suspension: Air ride w/auto and manual

controls

Axles: 3 ea. 5" dia., 25,000 # capacity **Electrical**: 12v with LED lighting, modular

Finish: Shot blast; epoxy prime, polyure-

thane top coat

Deck Ramp: Removeable

OPTIONS:

Aluminum outside wheels Aluminum inside wheels Wheel covers Air lift on 3rd axle 4th axle

Flip axle top brackets


Strobe lights





(866)817-7838

www.liddellindustries.com

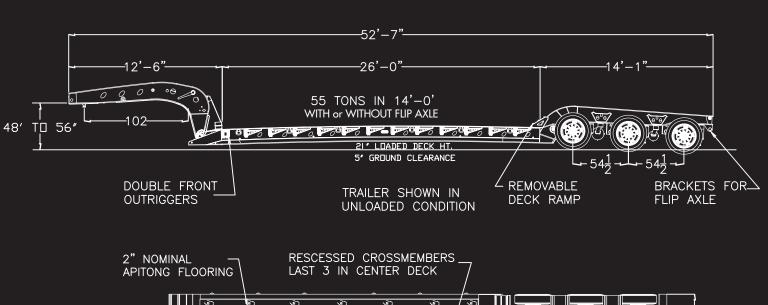

OUTRIGGERS ON

24" CENTERS

TRAYS